

# Experimental Investigation with Different Inclination Angles on Copper Oscillating Heat Pipes Performance Using $\text{Fe}_2\text{O}_3$ /Kerosene under Magnetic Field

H. R. Goshayeshi, M. Mansori, M. Ahmady, M. Khaloyi

**Abstract**—This paper presents the result of an experimental investigation regarding the use of  $\text{Fe}_2\text{O}_3$  nanoparticles added to kerosene as a working fluid, under magnetic field for Copper Oscillating Heat pipe with inclination angle of  $0^\circ$  (horizontal),  $15^\circ$ ,  $30^\circ$ ,  $45^\circ$ ,  $60^\circ$ ,  $75^\circ$  and  $90^\circ$  (vertical). The following were examined; measure the temperature distribution and heat transfer rate on Oscillating Heat Pipe (OHP), with magnetic field under different angles. Results showed that the addition of  $\text{Fe}_2\text{O}_3$  nanoparticles under magnetic field improved thermal performance of OHP especially in  $75^\circ$ .

**Keywords**—Copper oscillating heat pipe,  $\text{Fe}_2\text{O}_3$ , magnetic field, inclination angles.

## I. INTRODUCTION

PULSATING or otherwise known as oscillating heat pipes (OHPs) are passive heat transfer systems that can offer simple and reliable operation (no moving parts and vibration-free) with high effective thermal conductivity. OHPs were first invented in the early 1990s Hisateru Akachi [1] and present promising alternatives for the removal of high localized heat fluxes to provide a necessary level of temperature uniformity across the components that need to be cooled. When the temperature difference between evaporator and condenser exceeds a certain threshold, the gas bubbles and liquid plugs begin to oscillate spontaneously back and forth. The amplitude of oscillations is quite strong and the liquid plugs penetrate into both condenser and evaporator. The heat is thus transferred not only by the latent heat transfer like in other types of heat pipes, but also by sweeping of the hot walls by the colder moving fluid and vice versa. Hence, the heat transfer mechanism between the rising liquid film along a vertical and horizontal wall is an interesting research phenomena in OHPs.

A number of investigations concerning for horizontal wall in OHP have been made from both theoretical and applied viewpoints [2]-[6]. While most of OHPs are made vertically and a large number of researcher concerning for vertical OHP [7]-[9].

Khandekar et al. [10] experimentally studied Oscillating Heat Pipe using water and ethanol as working fluids. They found that OHP does not work at horizontal orientation but operate vertically as a thermosyphon. They found that

efficiency of the OHP depends on orientation, filling ratio and the inner diameter and number of bends of OHP. Phenomenon in an oscillating heat pipe is very complicated. A recent paper [11] gave a review on the working principle, research and development, effect of various parameters such as inclination angles, etc. Due to thermomagnetic convection effects and changes in magnetic properties of ferrofluid with temperature, magnetic field causes circulating flow that may lead to improvement in heat transport capability [12].

Literature review shows most studies on heat transfer in OHP have been consisted experimental measurements resulting in only a partial understanding of the effect of inclination and no paper has been published related to the effect of inclination angle of OHP with the use of  $\text{Fe}_2\text{O}_3$ /Kerosene under magnetic field. However, as demonstrated by [13], thermal resistances at the evaporator and condenser sections were influenced by several parameters, such as angle of inclination of OHP, inner wall can cause a large increase in heat flux for the nucleate boiling regime. Heat transfer in inclined OHP with  $\text{Fe}_2\text{O}_3$  with kerosene under magnetic field has received little attention in the literature in accordance with vertical and horizontal OHP. In order to achieve optimum design of these systems, it is essential to analyze the heat transfer and evaluate the critical OHP angle that is the angle at which the maximum heat transfer is achieved. The objective of this paper is to study about the thermal efficiency enhancement of Oscillating heat pipe with different inclination angle using  $\text{Fe}_2\text{O}_3$  /Kerosene under magnetic field.

## II. EXPERIMENTAL PROCEDURES

Prior to charging the working fluid into the copper OHP, the apparatus was evacuated, by placing it under suction pressure of 0.1 Pa for 15 minutes using a vacuum pump connected to a three way valve. Following this initial evacuation, the three way valve was used to isolate the vacuum pump and to allow the working fluid to be charged into the OHP, see Fig. 1.

In order to simulate a number of different heat loads on the evaporator section, an electric heater connected to the electricity source via a Variac and electrical monitoring system was used. The heat input was calculated using measurements obtained the electrical monitoring system which consisted of a standard volt and current meter. Experiments are conducted with varying heat inputs of 15-90W with an increment of 90 W. The uncertainty in the

H. R. Goshayeshi is with the Department of Mechanical Engineering, Mashhad Branch, Islamic Azad University, Mashhad, Iran, (e-mail: goshayeshi@yahoo.com).

voltage is  $\pm 0.4$  Volts and the uncertainty in reading the current is  $\pm 0.015$  Amps.

The temperatures at the various parts of the system (evaporator, adiabatic and condenser sections) were monitored using a set of type-K thermocouples connected to a portable data logging and display system. The uncertainty of measuring the temperature using the temperature monitoring arrangement was found to be  $\pm 1$  K. It should be mentioned that according to our error analysis error is less than 10%. All the other geometric parameters for the OHP are given in Table I.

For the current investigation, Kerosene as carrier, Oleic acid as a surfactant and nanoparticles of  $\text{Fe}_2\text{O}_3$  with 5 Vol.% were used. Nanoparticles of  $\text{Fe}_2\text{O}_3$  used in this investigation have properties which given in Table II. The  $\text{Fe}_2\text{O}_3$  nanofluid was added into the base fluid and then the base fluid with  $\text{Fe}_2\text{O}_3$  nanofluid was continuously mixed using a magnetic stirrer. It was also sonicated with the ultrasonic oscillator for 1 hour.

TABLE I

HEAT PIPE CONFIGURATION

| OHP container       | Copper |
|---------------------|--------|
| OHP length          | 380mm  |
| Condenser length    | 100mm  |
| Adiabatic length    | 100mm  |
| Evaporator length   | 100mm  |
| Outer diameter      | 3mm    |
| Wall thickness      | 1.25mm |
| Inner diameter      | 1.75mm |
| Liquid filled ratio | 50%    |
| Total length of OHP | 4.4 m  |

TABLE II

PROPERTIES OF IRON OXIDE NANOPOWDER ( $\text{Fe}_2\text{O}_3$ )

| Details: Iron Oxide nano powder (gamma - $\text{Fe}_2\text{O}_3$ - high purity) |            |
|---|------------|
| 99.5%   | Purity     |
| 20 nm   | APS        |
| 40-80 $\text{m}^2/\text{g}$   | SSA        |
| red brown   | Color      |
| Spherical   | Morphology |

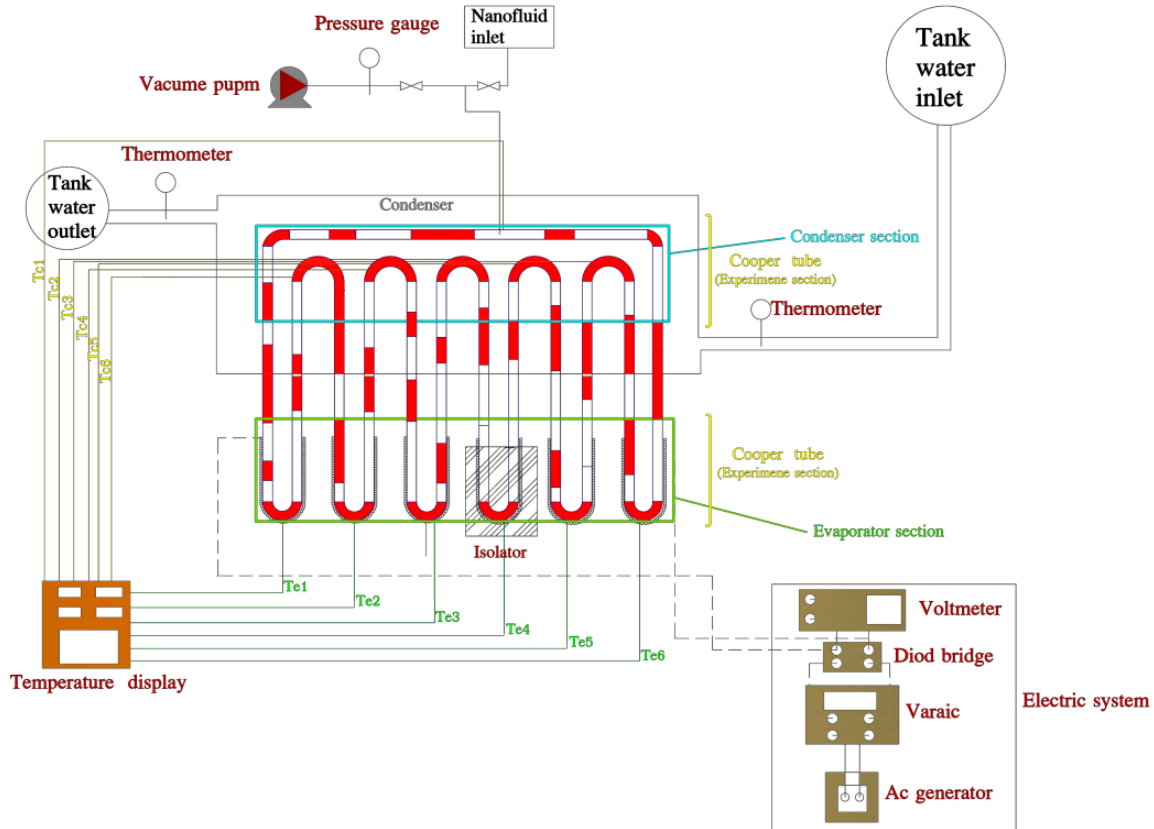


Fig. 1 Schematic of the experimental setup

### III. EXPERIMENTAL RESULTS

The mean condenser temperature ( $T_{c-mean}$ ) was calculated using the readings from the four condenser thermocouples according to (1). Due to the relatively high water flow in condenser section the temperature is constant during the experiment. The mean evaporator temperature ( $T_{e-mean}$ ) was also calculated using the readings from the four evaporator

thermocouples according to (2) and are used in this research to show the startup performance of ferrofluid used in OHPs.

$$T_{c-mean} = \frac{T_{c1} + T_{c2} + T_{c3} + T_{c4} + T_{c5} + T_{c6}}{6} \quad (1)$$

$$T_{e-mean} = \frac{T_{e1} + T_{e2} + T_{e3} + T_{e4} + T_{e5} + T_{e6}}{6} \quad (2)$$

The thermal resistance of the OHP is a measure of thermal performance, which is shown as:

$$R = \frac{T_e - T_c}{q_{in}} \quad (3)$$

where,  $T_e$  is the wall temperature of the evaporator and  $T_c$  is the wall temperature of the condenser.  $q_{in}$  is the input heat load onto the OHP which is calculated from the input current and voltage as follows:

$$q_{in} = VI \quad (4)$$

where,  $V$  is the input voltage that enter the electrical flat heater and  $I$  is the current measured by the digital multimeter.

Since the surface tension force inside the OHP pipe is dominant, an alternating chain of vapor and liquid sections is formed inside the pipe. The input heat flux, which is the driving force, increases the pressure of vapor plugs in the evaporator and the heat output decreases the pressure of vapor plugs in the condenser. So the installation angle of the OHP can be changed as shown in Figs. 2-8.

In this section, the obtained results of OHP angle effect on thermal resistance are presented. Figs. 2-8 show the thermal resistance as a function of the angle of inclination for  $\text{Fe}_2\text{O}_3/\text{Kerosene}$  without and with magnetic field. The heat thermal resistance for a particular angle of inclination, is normalized with the horizontal OHP. It is found that the critical angle is lower than  $90^\circ$ . It is seen from Fig. 7 an increase in inclination angle results in rise of the heat transfer coefficient at the  $75^\circ$ . It is speculated that application of magnetic field reduces the boundary layer thickness and improves convection heat transfer. A magnetic field pulls the nanoparticles in the magnetic nanofluid toward the walls of the evaporator and roughens its surface. This may result in

improving the boiling heat transfer. The effect of  $\text{Fe}_2\text{O}_3$  on two phase flow heat transfer enhancement may be illustrated through two reasons, the suspended  $\text{Fe}_2\text{O}_3$  increased the thermal conductivity of base fluid and the interactions among the  $\text{Fe}_2\text{O}_3$  and itself on one hand and between  $\text{Fe}_2\text{O}_3$  and the inner surface of the OHP on the other hand, also, the diffusion and collision intensification of  $\text{Fe}_2\text{O}_3$  near the wall due to increase in concentration of  $\text{Fe}_2\text{O}_3$  leads to rapid heat transfer from OHP wall to  $\text{Fe}_2\text{O}_3$ . The influence of magnetic field of OHP in thermal resistance is shown in Figs. 9 and 10. Comparing the two figures show the in copper OHP with magnetic field the thermal resistance is lower than without magnetic field OHP especially in  $75^\circ$ . The reason for reducing the thermal resistance with magnetic field especially in  $75^\circ$  can be explained as follows. A major thermal resistance of OHP is caused by the formation of vapor bubble at the liquid-solid interface. A large bubble nucleation size creates a higher thermal resistance that prevents the transfer of heat from the solid surface to liquid. The roughness of copper surface causes the larger bubble during the bubble formation. Bubble formation and their growth are initiated by collision between upward and downward liquid slug near evaporative section. Such frequent collision generates large number of bubble which eventually merges together and forms into lengthy OHP tube size vapor plug. The reason of that can be explained because copper tube provides better thermal efficiency and higher number of pressure fluctuations with higher amplitude. The transition region can be considered as the region in which the roughness emerges from a previously unaffected viscous sublayer. It is not necessary, however, to assume that the sublayer has not been changed by the presence of a submerged roughness. Perhaps a more acceptance description of the flow near the roughness element is shown in Fig. 11.

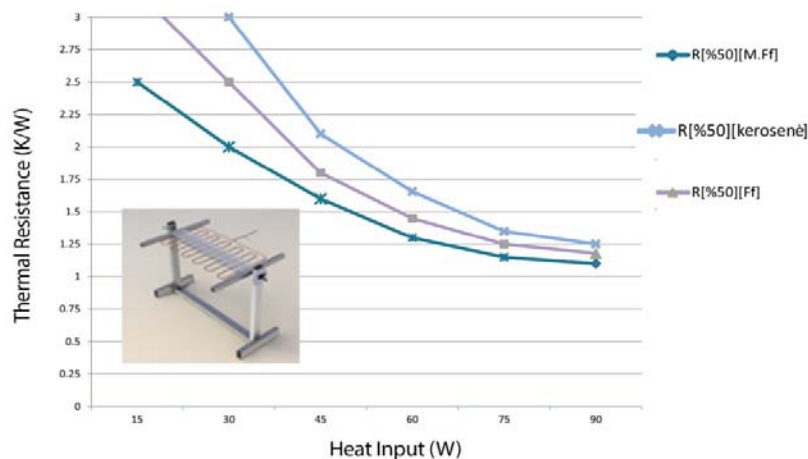


Fig. 2 Thermal Resistance of heat pipe for  $0^\circ\text{C}$  inclinations

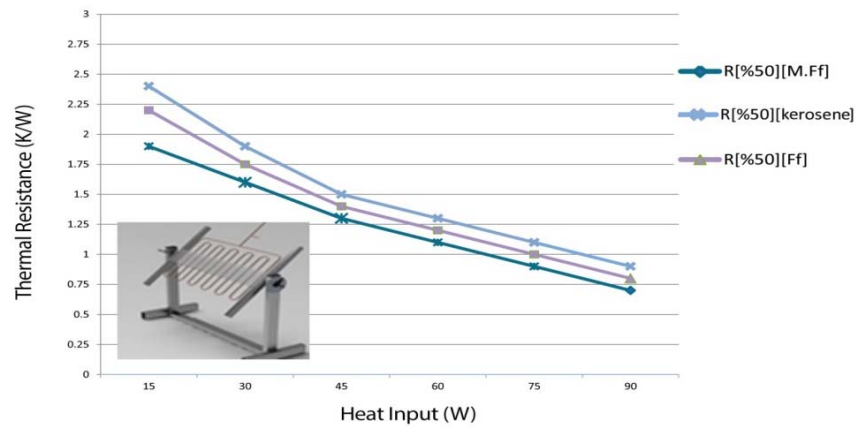


Fig. 3 Thermal Resistance of heat pipe for 15°C inclinations

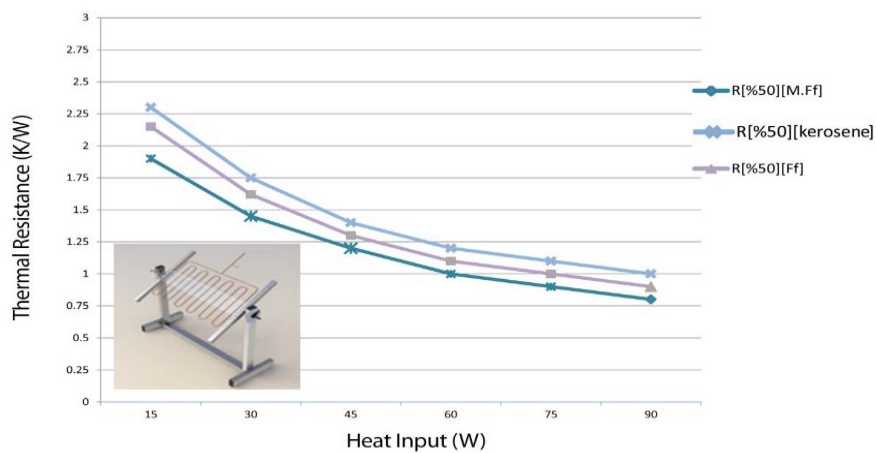


Fig. 4 Thermal Resistance of heat pipe for 30°C inclinations

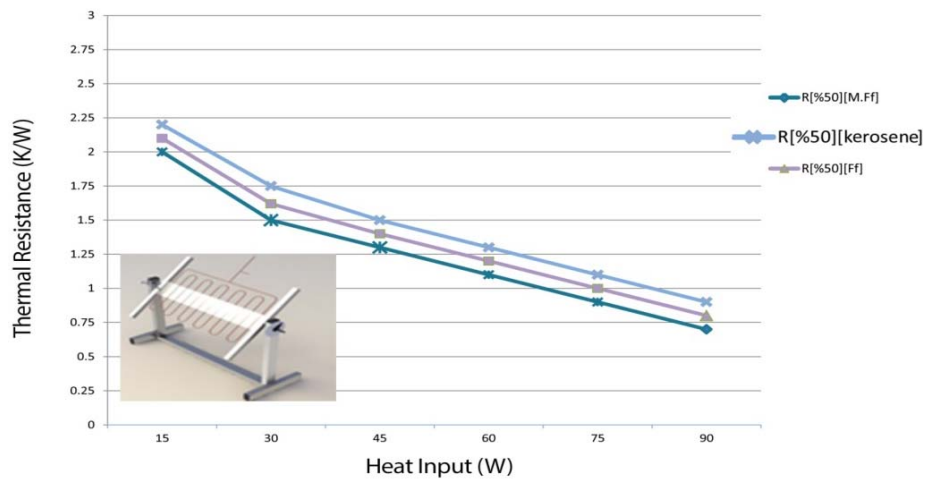


Fig. 5 Thermal Resistance of heat pipe for 45°C inclinations.

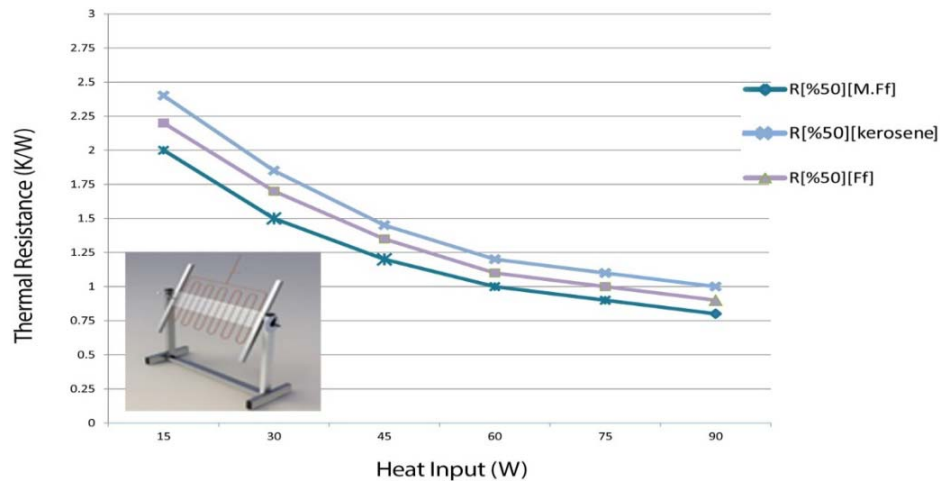


Fig. 6 Thermal Resistance of heat pipe for 60°C inclinations

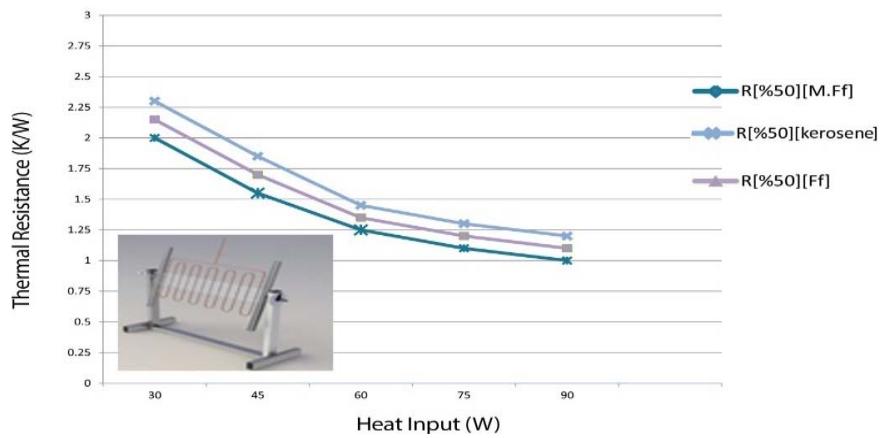


Fig. 7 Thermal Resistance of heat pipe for 75°C inclinations

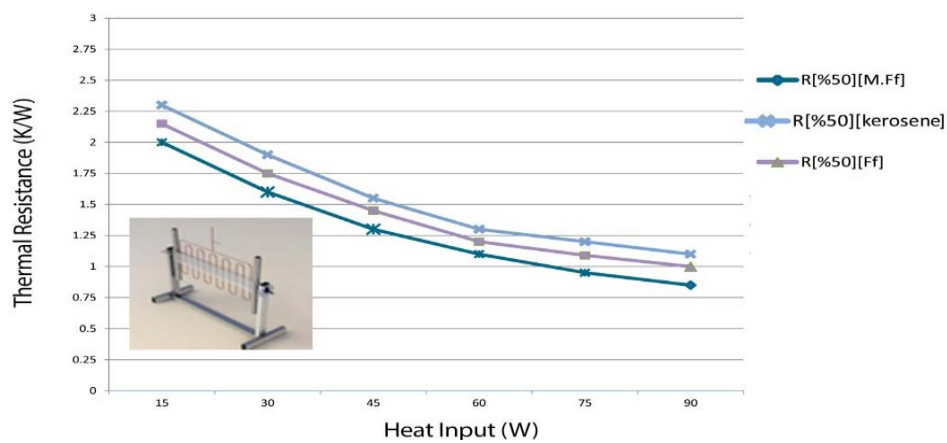


Fig. 8 Thermal Resistance of heat pipe for 90°C inclinations

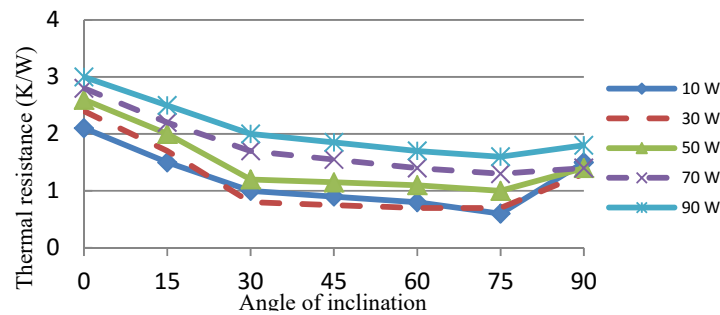


Fig. 9 Thermal resistance vs. inclination angle for ferrofluid with magnetic field

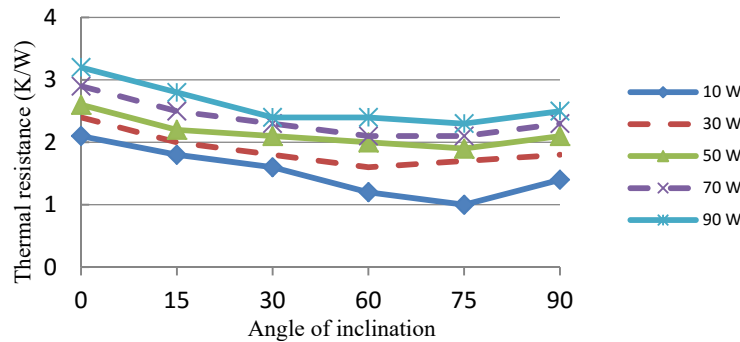


Fig.10 Thermal resistance vs. inclination angle for ferrofluid without magnetic field

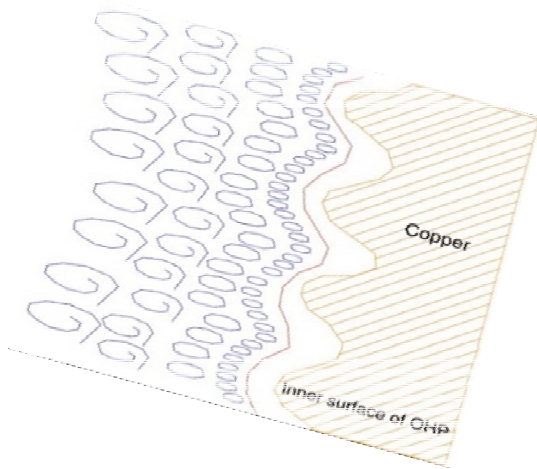


Fig. 11 Flow pattern near the rough wall at angle of 75°

This change in the turbulence level near the rough surface would have an effect on both the momentum and heat transfer rates. Disruption of the viscous sublayer and penetration of turbulence into the valley regions results in rapid increases in the rates of both momentum and heat transfer. A greater increase in the latter would be expected, as proportionately more of the resistance to heat transfer occurs in the viscous region.

#### IV. CONCLUSIONS

An experimental investigation was conducted for finding the thermal efficiency for a copper oscillating pipe under

different angle with  $\text{Fe}_2\text{O}_3/\text{Kerosene}$  nanofluids under different experimental conditions, the optimal thermal efficiency occurred at 75 degree inclination for copper oscillating heat pipe. Comparative analysis of inclination is shown in Figs. 9 and 10. Effect of gravity, pressure differential in the system, temperature and other parameters may have influence in this fact. The inclination operating angle changes the internal flow pattern thereby resulting in different performance levels. At a certain inclination angle, the mean heat transfer coefficient of the thermo siphon reached a maximum value. From the experimental results and discussion on the performance characteristic of copper and glass surfaces arrangement in OHP, the following conclusions may be drawn:

1. The heat transfer performance of OHPs was apparently improved after using the nanofluids and this increased efficiency is higher for the nanofluid of  $\text{Fe}_2\text{O}_3$  under magnetic field. The results indicate an increase of 16% in the heat transfer after using the  $\text{Fe}_2\text{O}_3$  nanofluids.
2. Magnetic nanofluids such as  $\text{Fe}_2\text{O}_3$  can decrease the thermal resistance relative to kerosene and as the result increase the thermal performance of Oscillating Heat Pipes. A 75° inclination angle relative to the horizontal axil is the optimum inclination angle for  $\text{Fe}_2\text{O}_3$  as a working fluid.
3. Angle of inclination of heat pipe also has an impact on the heat pipe performance. It encourages the condensation of liquid in the condenser section and can take more liquid flow to the evaporation. However, larger tilt angles i.e., closer to vertical position results in deterioration of

performance. It is due to faster condensate returns which affect the function of evaporation section.

#### APPENDIX: DATA ACCURACY

Every scientific experimental investigation involves various errors. The net effect of these errors is to cause a difference between the actual values of parameters and their values measured by the observer. Therefore, there is always an attempt to evaluate the existing errors in an experiment. In all the experiments, the heat power to the system has been calculated directly from the measured electrical power to the system. The error analysis has been performed with the method expressed by [14]. After carrying out a detailed error analysis and considering the accuracy of individual measurements, it was made clear that at low heat fluxes, the maximum measurement error in the input heat flux is less than 5.7%. When this heat flux increases, the error lowers to %2.4. According to this error analysis, it can be concluded that the measured quantities are appropriate.

As the result uncertainty can be shown as:

$$\frac{\Delta Q}{Q} = \left[ \left( \frac{\Delta V}{V} \right)^2 + \left( \frac{\Delta I}{I} \right)^2 \right]^{1/2}$$

The uncertainty in the thermal resistance depends on the applied heat input and temperature difference between the condenser and evaporator ends.

$$\frac{\Delta R}{R} = \left[ \left( \frac{\Delta Q}{Q} \right)^2 + \left( \frac{\Delta(\Delta T)}{\Delta T} \right)^2 \right]^{1/2}$$

The heat transfer coefficient  $h$ , is calculated by:

$$h = \frac{q}{\Delta T}$$

The uncertainty of heat transfer coefficient is given below and the parameters are heat flux and temperature difference of surface and vapor temperatures.

$$\frac{\Delta h}{h} = \left[ \left( \frac{\Delta q}{q} \right)^2 + \left( \frac{\Delta(\Delta T_v)}{\Delta T_v} \right)^2 \right]^{1/2}$$

The efficiency of the Oscillating Heat Pipe can be defined as the cooling water supplied to the condenser divided by heat input.

$$\eta_{th} = \frac{Q_c}{Q_{input}} = \frac{m \dot{C}_{pw} T_w}{Q_{input}}$$

The uncertainty in the thermal efficiency can be calculated by:

$$\frac{\Delta \eta}{\eta} = \left[ \left( \frac{\Delta Q}{Q} \right)^2 + \left( \frac{\Delta \dot{m}_c}{\dot{m}_c} \right)^2 + \left( \frac{\Delta(\Delta T_w)}{\Delta T_w} \right)^2 \right]^{1/2}$$

The uncertainties in thermal resistance, heat transfer coefficient and thermal efficiency are 0.329%, 0.318%, 0.410%, and 0.312%, respectively.

#### ACKNOWLEDGMENTS

This research was supported by Mashhad Azad University with grant number of 62115. The authors would like to express his sincere appreciation for all support provided by this university.

#### REFERENCES

- [1] Akachi, H. US Patent 4921041 1990.
- [2] A.Ghofrani, M.H. Dibaei, A. Hakim Sima, M.B. Shafii 2013" Experimental investigation on laminar forced convection heat transfer of ferrofluids under an alternating magnetic field" *Experimental Thermal and Fluid science* 49- 193-200.
- [3] Hsuan Hung -Yi, Ping Teng- Tun, - Gu Lin - Bo 2013" Evaluation of the thermal performance of a heat pipe using alumina nanofluids" *Experimental Thermal and Fluid Science* 44 - 504-511.
- [4] Ashouri.M, Ebrahimi.B, Shafii.M.B, Saidi.M.H, Saidi. M.S 2010" Correlation for Nusselt number in pure magnetic convection ferrofluid flow in a square cavity by a numerical investigation" *Journal of Magnetism and Magnetic Materials* 322 - 3607- 3613.
- [5] Jamshidi .Hamed, Arabnejad. Sajad, Behshad Shafii. M., Saboohi. Yadollah 2011" Thermal characteristics of closed loop pulsating heat pipe with nanofluids " *Journal of Enhanced Heat Transfer*, 18 (3): 221-237.
- [6] Tun- ping Teng, How- Gao Hsu, Huai- En Mo, Chien- Chih Chen 2010" Thermal efficiency of heat pipe with alumina nanofluid" *Journal of alloys and compounds* 504S- S380- S384.
- [7] Zhen- Hua Liu, Yuan- Yang Li, Ran Bao 2010" Thermal performance of inclined grooved heat pipes using nanofluids" *International Journal of Thermal sciences* 49 - 1680-1687.
- [8] Taslimifar. Mehdi, Mohammadi .Maziar, Afshin. Hossein, Saidi. Mohammad Hassan, Behshad Shafii.Mohammad 2013" Overall thermal performance of ferrofluidic open loop pulsating heat pipes: An experimental approach" *International Journal of Thermal Sciences* 65 - 234-241.
- [9] Yang Ping -Wang, Juan Chen - Xiu, Hua Liu - Zhen, peng Liu - Yi 2012" Application of nanofluid in an inclined mesh wicked heat pipes" *Thermochimica Acta* 539 - 100-108.
- [10] Khandekar S, et al. Themofluid dynamics study of flat closed loop pulsating heat pipes *Microscale Thermophys. Eng* 6(2002) 303-318.
- [11] Zhang Y , Faghiri A *Advances and unsolved issues in pulsating heat pipes*, *Heat Transfer Engineering*. 29 (2008) 20-44.
- [12] Mohamadi Maziar, Taslimifar Mehdi, Haghayegh Shahab Open- loop pulsating pipes charged with magnetic nanofluids: Powerful candidate for future electronic coolers *Journal of nanoscale and microscale thermophysical Engineering* Jan 2014.
- [13] Lotfi H. and Shafii M. Boiling heat transfer on a high temperature silver sphere in Nanofluid, *International Journal of Thermal Sciences*, Vol 48, No,12, 2009.
- [14] Holman, J. P., *Experimental Methods for Engineers*, 7<sup>th</sup> ed., McGraw Hill, New York, NY, 2001.