

# Applying Half-Circle Fuzzy Numbers to Control System: A Preliminary Study on Development of Intelligent System on Marine Environment and Engineering

Chen-Yuan Chen, Wan-I Lee, Yi-Chaio Sui, Cheng-Wu Chen

**Abstract**—This study focuses on the development of triangular fuzzy numbers, the revising of triangular fuzzy numbers, and the constructing of a HCFN (half-circle fuzzy number) model which can be utilized to perform more plural operations. They are further transformed for trigonometric functions and polar coordinates. From half-circle fuzzy numbers we can conceive cylindrical fuzzy numbers, which work better in algebraic operations. An example of fuzzy control is given in a simulation to show the applicability of the proposed half-circle fuzzy numbers.

**Keywords**—triangular fuzzy number; half-circle fuzzy numbers; predictions; polar coordinates; Lyapunov method

## I. INTRODUCTION

THE success of the application of fuzzy logic methods led to the proposal of triangular fuzzy numbers by Laarhoven and Pedrycz in 1983 [9]. Since then, triangular fuzzy numbers have often been applied in various real-world applications. Although triangular fuzzy numbers are easy and convenient to use, they still require complicated calculations in prediction [1-4]. In this study we make efforts to revise triangular fuzzy numbers to simplify these complicated operations. We call our new method half-circle fuzzy numbers. Half-circle fuzzy numbers are simpler and more convenient when applied in trigonometric functions and with polar coordinates can be used in integral or other difficult operations used for prediction. A new model based on half-circle fuzzy numbers, called cylindrical fuzzy numbers, is also developed. This new model should help make more precise predictions. We first review triangular fuzzy numbers, after which half-circle fuzzy numbers and basic polar coordinate operations are defined. The new cylindrical fuzzy number model is then applied in an example incorporating trigonometric functions and polar coordinates. Moreover, despite the many sophisticated fuzzy theories and control techniques that have been devised in the last few decades, triangular fuzzy numbers continue to be the most commonly

used in the arithmetic processes (see [11-17] and the references therein).

Triangular fuzzy numbers have the advantage of being simple representations so can be easily implemented by the great majority of industrial practitioners and control designers. However, to the best of our knowledge, the issues of application based on half-circle fuzzy numbers have seldom been discussed. To fill this gap we develop a half-circle fuzzy number model based on leading polar coordinates for use with trigonometric functions. We hope that fuzzy numbers can be applied in linear algebra, Laplace equations, differential equations, statistics, and other areas.

Recently, fuzzy theory and artificial intelligence have been successfully applied to the nonlinear system such as robot manipulation, engineering application and management (see [18-51] and the references therein). The fuzzy numbers are also accompanied to solve the prediction or forecasting problems. However, the comparison of all kinds of fuzzy numbers in fuzzy control is seldom discussed. This study will propose triangular and half-circle fuzzy numbers and demonstrate the control feasibility in T-S fuzzy systems.

## II. RELATED WORK AND THE NOVEL FUZZY NUMBER MODEL

In Mendel's 1995 report, membership functions were for the most part, associated with terms that appeared in the antecedents or consequents of rules, or in phrases. The most commonly used shapes for membership functions are triangular, trapezoidal, piecewise linear or Gaussian. Until very recently, membership functions have been chosen arbitrarily, based on user experience. As a consequence, the membership functions can be quite different for different users depending upon their experience, perspective, cultural background, etc. There are three main parts included in fuzzy inference: quantification, fuzzification and defuzzification. Membership function is a part of fuzzy inference.

### *Triangular fuzzy numbers*

Triangular fuzzy numbers as proposed by Laarhoven and Pedrycz (1983) are described below [5-6].

**Definition 1.** A fuzzy number  $M$  on  $\mathbf{R}$  ( $=(-\infty, +\infty)$ ) is a triangular fuzzy number if its membership function  $\mu_M : \mathbf{R} \rightarrow [0, 1]$  is equal to (1)

Chen-Yuan Chen is with Department of Computer Science, National Pingtung University of Education, Pingtung 90003, Taiwan  
Wan-I Lee is with Department of Marketing and Distribution Management National Kaohsiung First University of Science and Technology Kaohsiung 811, Taiwan  
Yi-Chaio Sui is with Institute of Business Administration National Kaohsiung First University of Science and Technology, Kaohsiung 811, Taiwan  
Cheng-Wu Chen is with Institute of Maritime Information and Technology National Kaohsiung Marine University, Taiwan.  
e-mail: chengwu@mail.nkmu.edu.tw

$$\mu_M(x) = \begin{cases} \frac{1}{m-l}x - \frac{l}{m-l}, & x \in [l, m] \\ \frac{1}{m-u}x - \frac{u}{m-u}, & x \in [m, u] \\ 0, & \text{otherwise} \end{cases} \quad (1)$$

where  $l \leq m \leq u$ ;  $l$  and  $u$  respectively stand for the lower and upper values in support of  $M$ ; and  $m$  stands for the model value. The triangular fuzzy number, as given by equation (1), can be denoted by  $(l, m, u)$ . The hypothesis of  $M$  is given as a set of elements  $\{x \in \mathbb{R} | l < x < u\}$ . The membership function of the triangular fuzzy number is shown in Figure 1 [7-8, 10].

Operations using fuzzy numbers are illustrated below.

Consider the following two triangular fuzzy numbers:

$$M_1 = (l_1, m_1, u_1) \text{ and } M_2 = (l_2, m_2, u_2)$$

- Addition

$$M_1 + M_2 = (l_1 + l_2, m_1 + m_2, u_1 + u_2)$$

- Subtraction

$$M_1 - M_2 = (l_1 - l_2, m_1 - m_2, u_1 - u_2)$$

- Multiplication

$$M_1 \times M_2 = (l_1 l_2, m_1 m_2, u_1 u_2), l_1, l_2 \geq 0$$

- Division

$$M_1 \div M_2 = (l_1 / u_2, m_1 / m_2, u_1 / l_2), l_1 \geq 0, l_2 > 0$$

#### Half-circle fuzzy numbers

A model of half-circle fuzzy numbers developed based on triangular fuzzy numbers is described in detail below.

**Definition 2.** A fuzzy number  $H$  is defined on  $\mathbb{R} (= (-\infty, +\infty))$  as a half-circle fuzzy number if its membership function  $\mu_H : \mathbb{R} \rightarrow [0, 1]$  is equal to (2)

$$\mu_H(x) = \begin{cases} \sqrt{1 - (x-h)^2}, & x \in [h-1, h+1] \\ 0, & \text{otherwise} \end{cases} \quad (2)$$

The membership function of a half-circle fuzzy number is shown in Figure 2.

Now, the operations for fuzzy numbers are presented.

Consider two triangular fuzzy numbers:

$$H_1 = (h_1 - 1, h_1, h_1 + 1) \text{ and } H_2 = (h_2 - 1, h_2, h_2 + 1)$$

- Addition

$$H_1 + H_2 = (h_1 + h_2 - 2, h_1 + h_2, h_1 + h_2 + 2)$$

- Subtraction

$$H_1 - H_2 = (h_1 - h_2 - 2, h_1 - h_2, h_1 - h_2 + 2)$$

- Multiplication

$$H_1 \times H_2 = ((h_1 - 1)(h_2 - 1), h_1 h_2, (h_1 + 1)(h_2 + 1)), h_1, h_2 \geq 1$$

- Division

$$H_1 \div H_2 = ((h_1 - 1)/(h_2 - 1), h_1/h_2, (h_1 + 1)/(h_2 + 1)), h_1, h_2 > 1$$

#### With polar coordinates

Polar coordinates are utilized to develop the circle function in half-circle fuzzy numbers as follows (Fig. 3):

$$f(r, \theta) : r^2 + r_0^2 - 2r_0 r \cos(\theta - \theta_0) = a^2, a \in \mathbb{R},$$

where  $(r_0, \theta_0)$  is the center of the circle described by polar coordinates with radius  $a$ .

We can now define half-circle fuzzy numbers using polar coordinates.

**Definition 3.**

$$\mu(r, \theta) = \begin{cases} r^2 + r_0^2 - 2r_0 r \cos(\theta - \theta_0) - 1, & r \in [r_0 - 1, r_0 + 1] \\ 0, & \text{otherwise} \end{cases} \quad (3)$$

## II. EXAMPLE

From the above mentioned two kinds of fuzzy numbers, triangular and half-circle fuzzy numbers, an example of T-S fuzzy control is given to compare the control effectiveness of these two. Before discussing the simulation example, a useful inequality is provided below.

**Lemma 1 [13]:** The equilibrium point of a closed-loop fuzzy

system  $\dot{x}(t) = \sum_{i=1}^r \sum_{l=1}^r h_i(t) h_l(t) \{ (A_i - B_i K_l) x(t) \}$  is asymptotically stable in the large, if there exists a common positive definite matrix  $P$  such that

$$(A_i - B_i K_l)^T P + P (A_i - B_i K_l) < 0, \quad (4)$$

where  $P = P^T > 0$ , and  $i, l = 1, 2, \dots, r$ .

The objective of this section is to choose the proposed triangular and half-circle membership functions which satisfy Eq. (4). Here we have the following:

Consider a nonlinear system described by the following equation [12]:

$$\begin{cases} \dot{x}_{11}(t) = -29x_{11}(t) + 1x_{21}(t) - 0.5x_{21}^2(t) \\ \dot{x}_{21}(t) = 3x_{11}(t) - 12x_{21}(t) - 0.5x_{21}^2(t) + u(t) \end{cases} \quad (5)$$

Step 1: We establish a T-S fuzzy model for the above system and the nonlinear system (5) can be approximated by the following fuzzy models:

Rule1: IF  $x_1(t)$  is  $M_{11}$  THEN  
 $\dot{x}_1(t) = A_1x_1(t) + B_1u_1(t)$ ,

Rule2: IF  $x_1(t)$  is  $M_{21}$  THEN  
 $\dot{x}_1(t) = A_2x_1(t) + B_2u_1(t)$ ,

where

$$x_1^T(t) = [x_{11}(t) \ x_{21}(t)] \quad , \quad A_1 = \begin{bmatrix} -29 & 1 \\ 3 & -12 \end{bmatrix} \quad ,$$

$$A_2 = \begin{bmatrix} -29 & 0.5 \\ 3 & -12.5 \end{bmatrix} \quad , \quad B_1 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad , \quad B_2 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad ,$$

and the triangular and half-circle membership functions for Rule 1 and Rule 2 are plotted in Figs. 4-5.

Step 2: In order to stabilize system (5), the feedback gains and common P should satisfy Eq. (4). The optimal matrices shown below are obtained via the Matlab LMI optimization toolbox.

$$K_1 = [-11.48 \quad -0.37] \quad , \quad K_2 = [-0.51 \quad 0.15] \quad ,$$

$$P = \begin{bmatrix} 1.50 & -0.28 \\ -0.28 & 1.76 \end{bmatrix} \quad .$$

The simulation results of triangular and half-circle fuzzy numbers are illustrated in Figs. 6-7. The initial conditions are  $x_1(0) = 1.7$  ,  $x_2(0) = -2.2$  .

It can be seen that system (4) is asymptotically stable; system trajectories starting from non-zero initial states asymptotically approach the origin. From Figs. 6-7, we see the control results of two kinds of fuzzy numbers are almost the same.

### III. CONCLUSIONS

The reason why triangular fuzzy numbers are so often used by researchers is that they make calculation simple and easy. In this study we successfully develop a half-circle fuzzy number model and polar coordinates. These half-circle fuzzy numbers are not only simple and easy to use but also make it easy to simulate different data. Some types of problems are especially suitable for half-circle fuzzy numbers. In addition, the intersection of half-circle fuzzy numbers is larger than

with triangular fuzzy numbers making them more accurate if we want to find the answer under some condition. Here, we use polar coordinates to transform half-circle fuzzy numbers from a rectangular coordinate system, introducing the triangular function to the fuzzy number function. The triangular function is easier in terms of calculation and for the simulating of dispersed data. A simulation example is utilized to demonstrate the applicability of the proposed half-circle fuzzy numbers. The results show the control effectiveness are almost the same while using different fuzzy numbers in T-S fuzzy control.

### IV. DISCUSSION

Taiwan is a maritime country. Most of each county all border with the ocean and on salt water. Many demands and pressures are placed on Taiwan's ocean problem and marine environment. Classic sectors such as transportation, shipbuilding and fishing are being joined by other uses. They include offshore gasoline, recreational fishing, aquaculture, eco-tourism and pleasure boating. The awareness of intelligent system is giving rise to current marine environment and engineering, which makes this roadmap necessary.

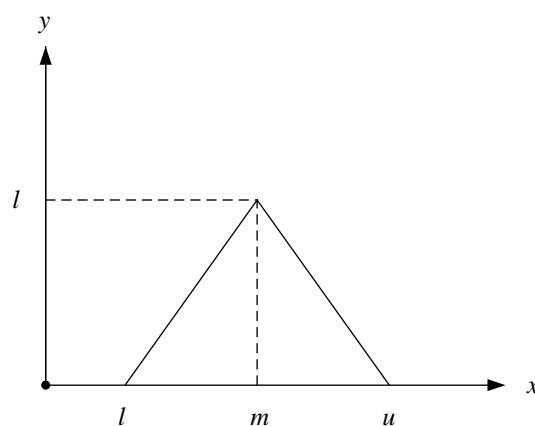


Fig. 1 Membership function of a triangular fuzzy number

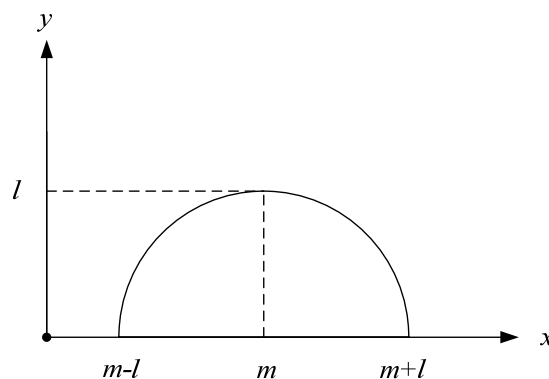


Fig. 2 Membership function of a half-circle fuzzy number

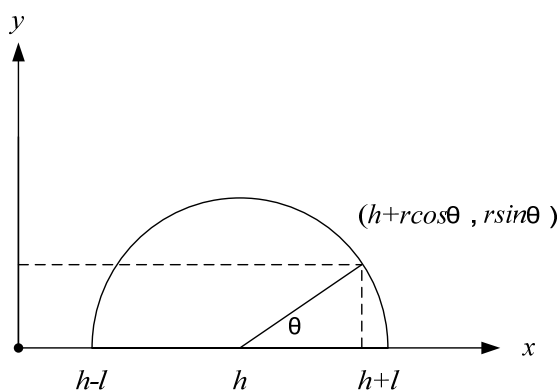


Fig. 3 Membership function of a half-circle fuzzy number using polar coordinates

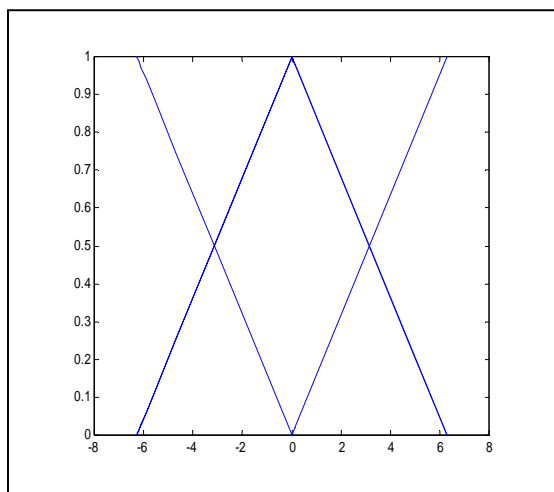


Fig. 4 The membership function of triangle.

#### ACKNOWLEDGEMENT

The authors would like to thank the National Science Council of the Republic of China, Taiwan, for their financial support of this research under Contract Nos. NSC 98-2221-E-153-004-, and NSC 99-2628-E-153-001. The authors are also most grateful for the kind assistance of the constructive suggestions of the anonymous reviewers all of which has led to the making of several corrections and suggestions that have greatly aided us in the presentation of this paper.

#### REFERENCES

[1] A. Bogomolny, *On the perimeter and area of fuzzy sets*, Fuzzy Sets and Systems, 23 (1987) 257-269.  
 [2] D. Dubois and H. Prade, *Fuzzy Sets and Systems: Theory and Applications*, Academic Press, New York 1980.  
 [3] H. J. Zimmermann, *Fuzzy Sets, Decision Making and Expert Systems*, (1991) Boston: Kluwer Academic Publisher.  
 [4] H. J. Zimmermann., *Fuzzy Set Theory and Its Applications*, (1991) Kluwer, Dordrecht.

[5] J. J. Buckley, E. Eslami, *Fuzzy plane geometry I: Points and lines*, Fuzzy Sets and Systems, 86 (1997) 179-187.  
 [6] J.J. Buckley, E. Eslami, *Fuzzy plane geometry II: Circles and polygons*, Fuzzy Sets and Systems, 87 (1997) 79-85.  
 [7] J. J. Buckley, *Ranking alternatives using fuzzy number*, Fuzzy Set and System, 15 (1985) 21 -31.  
 [8] J. J. Buckley, *Fuzzy Hierarchical Analysis*, Fuzzy Sets and System, 17 (1985) 233-247.  
 [9] P.J.M. van Laarhoven and W. Perdrycz, *A fuzzy Extension of Saaty priority theory*, Fuzzy Set and Systems, 11 (1983) 229-241.  
 [10] Jr. Roy Goetschel and Voxman William, *Topological properties of fuzzy numbers*, Fuzzy Sets and Systems, 10 (1983) 87-99.  
 [11] J.M. Mendel, *Fuzzy logic systems for engineering: A tutorial*, Proceedings of the IEEE, 83 March 1995.  
 [12] F.H. Hsiao, W.L. Chiang, C.W. Chen, S.D. Xu and S.L. Wu, *Application and robustness design of fuzzy controller for resonant and chaotic systems with external disturbance*, International Journal of Uncertainty, Fuzziness and Knowledge-Based System, 13 (2005) 281-295.  
 [13] C.W. Chen, W.L. Chiang, and F.H. Hsiao, *Stability analysis of T-S fuzzy models for nonlinear multiple time-delay interconnected systems*, Mathematics and Computers in Simulation, 66 (2004) 523-537.  
 [14] F.H. Hsiao, C.W. Chen, and Y.W. Liang et al., *T-S fuzzy controllers for nonlinear interconnected systems with multiple time delays*, IEEE Trans. Circuits & Systems-I, 52 (2005) 1883- 1893.  
 [15] C.Y. Chen, R.C. Hsu and C.W. Chen, *Fuzzy logic derivation of neural network models with time delays in subsystems*, International Journal on Artificial Intelligence Tools, 14 (2005) 967-974.  
 [16] T.Y. Hsieh, Morris H. L. Wang, and C.W. Chen et al., *A new viewpoint of s-curve regression model and its application to construction management*, International Journal on Artificial Intelligence Tools, 15 (2006) 131-142.  
 [17] C.W. Chen, W.L. Chiang, and C.H. Tsai et al., *Fuzzy Lyapunov method for stability conditions of nonlinear systems*, International Journal on Artificial Intelligence Tools, 15 (2006) 163-171.  
 [18] C.W. Chen, C.L. Lin, C.H. Tsai, C.Y. Chen, and K. Yeh, *A novel delay-dependent criteria for time-delay T-S fuzzy systems using fuzzy Lyapunov method*, International Journal on Artificial Intelligence Tools, 16 (2007) 545-552.  
 [19] V.E. Omurlu, S.N. Engin, and I. Yuksek, *Application of fuzzy PID control to cluster control of viaduct road vibration*, Journal of Vibration and Control, 14 (2008) 1201-1215.  
 [20] F. H. Hsiao, J. D. Hwang, C.W. Chen and Z. R. Tsai, *Robust stabilization of nonlinear multiple time-delay large-scale systems via decentralized fuzzy control*, IEEE Trans. Fuzzy Systems, 13 (2005) 152-163.  
 [21] F. Amini and R. Vahdani, *Fuzzy optimal control of uncertain dynamic characteristics in tall buildings subjected to seismic excitation*, Journal of Vibration and Control, 14 (2008) 1843-1867.  
 [22] C.W. Chen, *Stability conditions of fuzzy systems and its application to structural and mechanical systems*, Advances in Engineering Software, 37 (2006) 624-629.  
 [23] F.H. Bellamine and A. Elkamel, *Model order reduction using neural network principal component analysis and generalized dimensional analysis*, Engineering Computations, 25 (2008) 443-463.  
 [24] C.W. Chen, K. Yeh, W.L. Chiang, C.Y. Chen and D.J. Wu, *Modeling, H<sub>∞</sub> control and stability analysis for structural systems using Takagi-Sugeno fuzzy model*, Journal of Vibration and Control, 13 (2007) 1519-1534.  
 [25] T.C. Kuo, Y.J. Huang, H.H. Yu, *FRSMC Design for the steering control and diving control of underwater vehicles*, Journal of Marine Science and Technology, 17 (2009) 50-59.  
 [26] C.Y. Chang, K.C. Hsu, K.H. Chiang et al., *Modified fuzzy variable structure control method to the crane system with control deadzone problem*, Journal of Vibration and Control, 14 (2008) 953-969.  
 [27] S. Zadrozny and J. Kacprzyk, *On an interpretation of keywords weights in information retrieval: some fuzzy logic based approaches*, International Journal of Uncertainty, Fuzziness and Knowledge-Based System, 17 (2009) 41-58.

- [28] C. H. Tsai, C.W. Chen, W. L. Chiang, and M. L. Lin, *Application of geographic information system to the allocation of disaster shelters via fuzzy models*, Engineering Computations, 25 (2008) 86-100.
- [29] M.T. Mizukoshi, L.C. Barros, R.C. Bassanezi, Stability of fuzzy dynamic systems, International Journal of Uncertainty, Fuzziness and Knowledge-Based System, 17 (2009) 69-83.
- [30] K. Yeh, C.Y. Chen, and C.W. Chen, *Robustness design of time-delay fuzzy systems using fuzzy Lyapunov method*, Applied Mathematics and Computation, 205 (2008) 568-577.
- [31] M. Rezaia, A.A. Javadi, and O. Giustolisi, *An evolutionary-based data mining technique for assessment of civil engineering systems*, Engineering Computations, 25 (2008) 500-517.
- [32] C. Y. Chen, C. W. Shen, C.W. Chen, K. F. R. Liu, and M. J. Jeng, *A stability criterion for time-delay tension leg platform systems subjected to external force*, China Ocean Engineering, 23 (2009) 49-57.
- [33] S.H.L. Mirhosseyni and P. Webb, *A hybrid fuzzy knowledge-based expert system and genetic algorithm for efficient selection and assignment of material handling equipment*, Expert Systems with Applications, 36 (2009) 11875-11887.
- [34] G. Athanasopoulos, C.R. Riba, C. Athanasopoulou, *A decision support system for coating selection based on fuzzy logic and multi-criteria decision making*, Expert Systems with Applications, 36 (2009) 11848-10853.
- [35] S.M. Chen, N.Y. Wang, J.S. Pan, *Forecasting enrollments using automatic clustering techniques and fuzzy logical relationships*, Expert Systems with Applications, 36 (2009) 11070-10076.
- [36] F.G. Zhao, J. Chen, L. Guo et al., *Neuro-fuzzy based condition prediction of bearing health*, Journal of Vibration and Control, 15 (2009) 1079-1091.
- [37] C.W. Chen, *Modeling and control for nonlinear structural systems via a NN-based approach*, Expert Systems with Applications, 36 (2009) 4765-4772.
- [38] M.B. Trabia, J.M. Renno, K.A.F. Moustafa, *Generalized design of an anti-swing fuzzy logic controller for an overhead crane with hoist*, Journal of Vibration and Control, 14 (2008) 319-346.
- [39] P.C. Chen, C.W. Chen and W.L. Chiang, *GA-based modified adaptive fuzzy sliding mode controller for nonlinear systems*, Expert Systems with Applications, 36 (2009) 5872-5879.
- [40] S. Yildirim, S. Erkaya, I. Eski et al., *Noise and vibration analysis of car engines using proposed neural network*, Journal of Vibration and Control, 15 (2009) 133-156.
- [41] C.Y. Chen, J.W. Lin, W.I. Lee, and C.W. Chen, *Fuzzy control for an oceanic structure: a case study in time-delay TLP system*, Journal of Vibration and Control, accepted.
- [42] O. Boudighaghen, M. Boughanem, H. Prade et al., *A fuzzy logic approach to topic extraction in texts*, International Journal of Uncertainty, Fuzziness and Knowledge-Based System, 17 (2009) 81-112.
- [43] C.W. Chen, *Application of fuzzy-model-based control to nonlinear structural systems with time delay: an LMI method*, Journal of Vibration and Control, accepted.
- [44] J.W. Tu, W.L. Qu, J. Chen, *An experimental study on semi-active seismic response control of a large-span building on top of ship lift towers*, Journal of Vibration and Control, 14 (2008) 1055-1074.
- [45] P.C. Chen, C.W. Chen and W.L. Chiang, *GA-based fuzzy sliding mode controller for nonlinear systems*, Mathematical Problems in Engineering, Doi: 10.1155/2008/325859 (2008).
- [46] F.H. Hsiao, C.W. Chen, Y.H. Wu and W.L. Chiang, *Fuzzy controllers for nonlinear interconnected TMD systems with external force*, Journal of The Chinese Institute of Engineers, 28 (2005) 175-181.
- [47] Q.S. Zhong, J.F. Bao, and Y.B. Yu, et al., *Impulsive control for T-S fuzzy model-based chaotic systems*, Mathematics and Computers in Simulation, 79 (2008) 464-475.
- [48] C.L. Lin, J.F. Wang, C.Y. Chen, C.W. Chen, and C.W. Yen, *Improving the generalization performance of RBF neural networks using a linear regression technique*, Expert Systems with Applications, 36 (2009) 12049-12053.
- [49] G. Buyukozkan, and D. Ruan, *Evaluation of software development projects using a fuzzy multi-criteria decision approach*, Mathematics and Computers in Simulation, 77 (2008) 409-415.
- [50] K. Guesmi, N. Essounbouli, and A. Hammoui, et al., *Shifting nonlinear phenomena in a DC-DC converter using a fuzzy logic controller*, Mathematics and Computers in Simulation, 76 (2008) 398-409.
- [51] C.W. Chen, *The stability of an oceanic structure with T-S fuzzy models*, Math. Comput. Simul. (2009), doi:10.1016/j.matcom.2009.08.001.
- [52] F. Amini and R. Vahdani, *Fuzzy optimal control of uncertain dynamic characteristics in tall buildings subjected to seismic excitation*, Journal of Vibration and Control, 14 (2008) 1843-1867.