

Isolation and Screening of Fungi for Aerobic Delignification and Reduction of AOX of Pulp and Paper Mill Effluent

N. Lokeshwari, G Srinikethan, S. G. Joshi, I. Shasikala, B. Srikanth, Bashirahmed, L. Sushma

Abstract—Water pollution is a major concern for the pulp and paper industry due to the large quantities of effluents generated. Biodegradation of industrial Lignin and AOX by a fungal isolate identified as *Aspergillus flavus*, white rot fungi which was isolated from Pulp and Paper effluent was studied in batch flask system with industrial effluent and synthetic solution. The flasks were operated at temperature 32°C at 200rpm for eight days in continuous mode. The average overall pH, Temperature, DO, C.O.D, T.D.S, T.S.S, Lignin, AOX were up to 4.56, 32°C, 4.2mg/l, 104mg/l, 6000 mg/l, 4000mg/l, 575.5mg/l, 2195 mg/l respectively after treatment. The *Aspergillus flavus* sp was the most effective in the biodegradation of Lignin of pulp industry for 94% at 480nm, AOX for 62% at 510nm and of chemical oxygen demand levels for 45% after 8 days of incubation. The optimal conditions found were 4 pH and 32°C temperature for lignin and AOX degradation.

Keywords—*Aspergillus flavus*, Lignin, Optimal conditions, Quantification studies.

I. INTRODUCTION

PULP and paper industry is considered as one of the polluter industry in the world and also it is one of the major water-intensive chemical processes. The water consumption changes depending on the production process and it can get as high as 60 m³/ton paper produced in spite of the most modern and the best available technologies. Waste water from production of bleached kraft pulp contains organic acids, carbohydrates, resin acids, lignin transformation products and variety of chlorinated derivatives [1]. The paper mill wastewater characteristically contains color, very high level of Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), due to presence of lignin and its derivatives from the raw cellulosic materials, chlorinated compounds, suspended solids (mainly fibres), fatty acids, tannins, resin acids, sulphur and sulphur compounds, etc [2]. These effluents contain many organic compounds, derived from lignin, which are responsible for their brown color. The content in low molecular weight chloro-organics of residues, generated by pulp and paper industry, is the major contributors

to mutagenicity and bioaccumulation, due to their hydrophobicity and ability to penetrate cell membranes [3].

All these organic compounds are toxic to aquatic organisms and resistant to microbial degradation, resulting in a decrease of the ecological value of natural systems surrounding the pulp mill [4].

Conventional procedures to treat these effluents involve physical and biological techniques with no complete degradation of the recalcitrant organic matter [5]. Therefore it is required to find out alternative treatment mechanisms. Biological processes using microbial systems provide an alternative to the existing physical/ chemical technologies (expensive and commercially unattractive) because they are more cost-effective, simple in design [6], environment friendly and do not produce large quantities of sludge [7]. Biodegradation is used to describe the complete mineralization of the starting compound to simpler ones like CO₂, H₂O, NO₃ and other inorganic compounds [8].

Black color of the effluent is due to lignin and its derivatives which may increase water temperature and leads to decrease concentration of dissolved oxygen. Based on these problems, it is required to degrade lignin and color from pulp and paper industry [9]. Bacteria fail to degrade high molecular weight chlorolignin, the reason may be due to the fact that bacteria can produce intracellular enzyme capable of degrading lignin like structures, and the high molecular weight chlorolignin cannot penetrate the bacterial cell membrane [10]. Few microorganisms especially fungus *P. chrysosporium*, *Trametes*, *Phlebia*, *Aspergillus* sps, *Cladosporium* sps are commonly used for lignin degradation [11]. The comparison of decolorization by different organisms show that white rot fungi *P.chrysosporium* and *C. versicolor* were suitable for efficient degradation of the recalcitrant chromophoric material in bleach plant effluents [12].

White-rot fungi are primarily responsible for the initial decomposition of lignin in wood, which occurs via an oxidative and relatively nonspecific process [13], [14]. *Phanerochaete chrysosporium*, a white-rot-wood decaying basidiomycete, produces a potent lignin degrading system that oxidizes lignin completely to CO₂ [15]. The utilization of *P. chrysosporium* in waste water treatment is gaining importance in paper industries, because of their ability to degrade lignin in wood [16]. Attempts have been made to remove the color of the effluent from a Kraft mill by using *P. chrysosporium* and

F.A N. Lokeshwari, Bashirahmed, Sushma.L and S.G. Joshi are with the SDM College of Engineering and Technology, Dharwad. 580 002, Karnataka, India (Phone: 0836-2448327; Fax: 0836-2464638; e-mail: lokeshwarinavalgund@gmail.com).

S.A G. Srinikethan is with Department of Chemical Engineering, NITK-Surathkal 575 025 Karnataka. India.

T.A I. Shashikala and B. Srikanth are with Department of Biochemistry, Karnataka University, Dharwad. 580 002 Karnataka. India.

from the pulp waste by *Tinctoria* sp. [17] and *Aspergillus* sp. [18].

Recent developments in new technologies and improvement of existing ones for the treatment of effluents from the pulp and paper industries include the use of the white rot fungi *Phanerochaete chrysosporium* and *Trametes versicolor* [19]. Very limited experience is available on the possibility of direct degradation of highly contaminant black liquors by fungi. Hence the study reports on effective biodegradation of Industrial Lignin and AOX with optimum process parameters by white rot fungi which was isolated and identified as *Aspergillus flavus*.

II. MATERIALS AND METHODOLOGY

A. Sampling and Analysis of Waste Water

Wastewater of pulping process from the Pulp and Paper Company in Karnataka state was used in this study. The samples were collected in the plastic container and were brought to the laboratory and immediately stored in refrigerator at 4°C until used for further analysis. The color unit of the effluent was by taking Absorbance readings at 465 nm of both the original and the decolorized effluents were converted to color units (CU) by the equation: $CU = 500 \times \text{Am} / 0.132$ where 0.132 is the absorbance of 500 CD platinum-cobalt standard solution [20]. The pH of the effluent was measured with the help of electronic pH meter. COD, BOD, Total dissolved and suspended solid were analyzed according to the standard method for the Examination of Water and Wastewater [21]. Lignin and AOX concentration was analyzed by UV-Visible spectrophotometer (U- 3010) with detection wavelength of 300-700nm.

B. Isolation of Fungus

Waste water samples were collected from nearby Paper and Pulp industries. The standard method, called drop spore or shoot spore technique was used for fungal spore isolation. The technique used was aimed to obtain samples onto Potato Dextrose agar (PDA; pH 5-6) containing antibiotics (0.3g/L penicillin and 1.3g/L streptomycin). The agar plates containing the waste water samples were then incubated at 30°C for 24 hours. The resulting spores were observed as groups which would be afterwards isolated using Nichrome loop wire in Laminar flow chamber and placed onto PDA agar containing antibiotics. The growing fungal mycelium was sub cultured until the purified fungal strains were obtained and pure culture obtained was stored at 4°C.

C. Screening of Potential Fungus

Screening of the fungus was done by growing the fungal strains on broth media containing 1% lignin source at 30°C for 5 days by providing nitrogen source (KNO_3). In the present study, black liquor was used as lignin source. The strains that were capable of degrading lignin in the wastewater from pulp and paper industries were theoretically able to survive and grow well on this agar. Plates were observed for growth and color change from colorless to green around the culture growth, which indicate the ligninolytic nature of the culture.

D. Identification and Characterization of Potential Fungus

The selected strain was identified according to their basic morphology at mycology department. Morphological examination was performed using a light microscope equipped with a micrometer eyepiece with 400x magnifications. The strain is identified as Fungi *Aspergillus flavus*. It grows by producing thread like branching filaments known as hyphae. Filamentous fungi such as *A. flavus* are sometimes called molds. A network of hyphae known as the mycelium secretes enzymes that break down complex food sources. The resulting small molecules are absorbed by the mycelium to fuel additional fungal growth. When young, the conidia of *A. flavus* appear yellow green in color. As the fungus ages the spores turn a darker green.

E. Process Optimization Parameters

The optimum conditions of temperature and pH were determined for percentage degradation of Lignin and AOX by isolated fungi. The Shake flask experiments were carried out using broth media in 250ml conical flasks inoculated with fungi and incubated for 48 hours for different temperatures (15°C, 32°C and 37°C) and pH (4, 6 and 8).

F. Degradation of Lignin and AOX

The shaker flask with BR media, lignin solution and with optimum process parameters was autoclaved and inoculated with the fungi. The BR media used was KH_2PO_4 -70ml, KCL-15ml, ZnSO_4 -8ml, MgSO_4 -20ml, FeSO_4 -20ml, MnSO_4 -6ml, $\text{NH}_4\text{NO}_3/\text{KNO}_3$ -1g. The inoculated flask was subjected to shaker with the speed of 200rpm for 2hrs. Then the flask was kept undisturbed for 48hrs for period of 8days and the degradation in Lignin was observed. Similar experiment was done for AOX.

G. Lignin and AOX Analysis

The Lignin concentrations in the samples were analysed using UV-Vis Spectrophotometer (U-3010). Lignin absorbance was measured between the wavelength range of 280nm 480nm. Lignin and AOX concentration was measured by the calibration chart as shown in Figs. 1 and 2. Adsorbable Organic Halide (AOX) refers to amount of halide, principally chloride. The concentration of AOX was determined by calibration curve for AOX for 510nm using UV-Vis Spectrophotometer (U-3010).

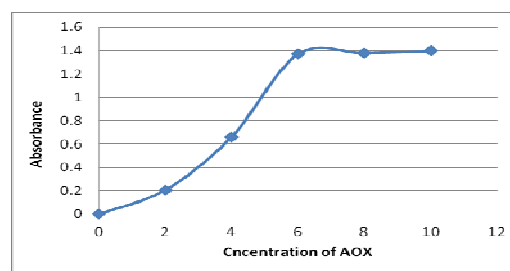


Fig. 1 Calibration curve of AOX

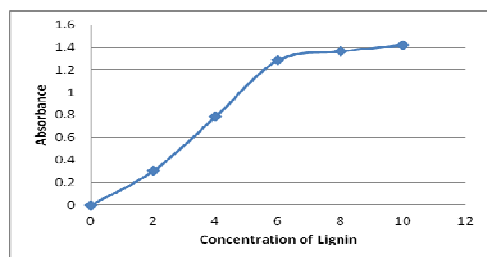


Fig. 2 Calibration curve of Lignin

III. RESULTS AND DISCUSSION

A. Analysis of Waste Water Quality

The effluent of the samples was obtained from local Kraft Pulp and Paper mill. The characteristics of waste water analyzed, are given in Table I.

TABLE I
 CHARACTERISTICS OF WASTE WATER FORM PULPING PROCESS

Parameter	Values
pH	6.5
Colour	Dark Brownish
COD (mg/l)	289.33
DO (mg/l)	7.9
TDS (mg/l)	12000
TSS (mg/l)	8000
Lignin Concentration (mg/l)	9590.64

B. Isolation, Screening and Identification of Fungi

The isolate was isolated from Pulp effluent on PDA agar medium. The PDA medium was prepared, autoclaved and inoculated. Serially diluted samples were inoculated into the petri-dishes containing solidified PDA media in a sterilized environment. The inoculation of the sample is done by adding the 1ml of sample into the petri-dish containing PDA media. The inoculated petri-dishes were kept undisturbed for 48 hours for the spore formation. By using the single spore isolation method, the spore of the fungus was isolated and transferred to the test-tubes containing the solidified PDA media. The culturing of the isolated fungus occurs in PDA media. After 2 days, the growth of the fungus was observed. The maintenance was done by sub-culturing of the isolated fungus onto the PDA slants and incubating at room temperature for 2 days. The sub-culturing helps in obtaining the pure culture of the isolated fungus. The sub-cultured fungus was stored at 4°C. Screening was done for Lignin quantification. Based on the microscopic studies, the fungal isolate was found to be *Aspergillus Flavus* as shown in Fig. 3. A network of hyphae known as the mycelium secretes enzymes that break down complex food sources.

Isolation of *Aspergillus flavus* from the wastewater of pulp and paper industries and the examination of their ability to biodegrade lignin could be of great advantage. Several factors, such as temperature, pH, oxygen concentration and the microorganism influence the degradation of lignin [22]. Hence, in this section, lignin and AOX quantification was carried out to determine whether *Aspergillus flavus* feeds on

lignin and AOX as shown in Fig. 4. In lignin quantification, the lignin was reduced up to 58% and AOX up to 50% in 8 days. The degradation percentage of lignin and AOX were low, it may be because *Aspergillus flavus* mainly fed on the broth media.

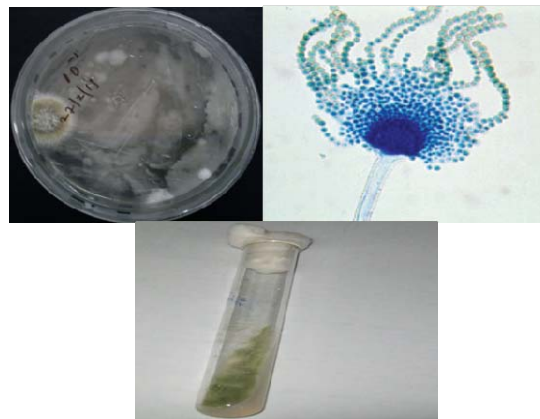


Fig. 3 Isolated strain on Petridish, *Aspergillus Flavus*, Pure Culture of fungi

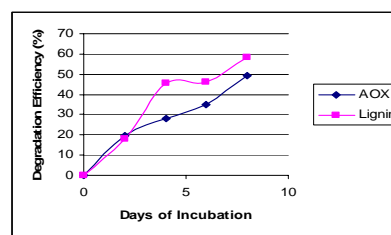


Fig. 4 Lignin and AOX Quantification

C. Optimization Studies

The optimum temperature was found to be 32°C. White-rot fungus which can grow in a wide range of temperature has no growth at any temperature below 10°C and no significant change in growth rate occurs between 30°C and 39°C. And also, according to literature, the optimal growth of white-rot fungus occurs at 39°C but unlike most fungi, *Aspergillus flavus* readily grows between the temperatures of 25-32°C. Lignin degradation was adversely affected with increase in temperature, but in contrast [11] showed optimum temperature for lignin degradation as 40 to 50°C by fungal consortia.

The studies [23], [24] reported that 4.0 to 8.0 ranges are best suitable for the treatment for pulp and paper effluent. The optimum pH was found to be 4 as the optimal growth of *Aspergillus flavus* occur between the range of 4.0 to 4.5, and at high oxygen content. In contrast a previous report [25, 26] showed alkaline pH as best suitable for lignin degradation by *Aspergillus fumigatus* and *Bacillus licheniformis* respectively. Fungi are recognized for their great ability to produce a large variety of extra cellular proteins, organic acids and other metabolites [27], being this process highly dependent from the substrates used by the fungi, which in turn influences the pH of extracellular environment.

The *Aspergillus flavus* is capable of degrading the lignin producing vanilic acid & methanol. The degradation at 32°C

and 4 pH was maximum from experiments conducted as shown in Figs. 5 and 6. The delignification efficiency was found to be nearly 80% and AOX reduction was nearly 70% for optimum temperature and pH in broth medium.

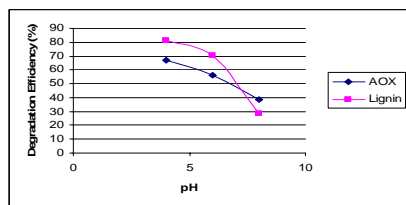


Fig. 5 pH effect on Degradation of Lignin and AOX

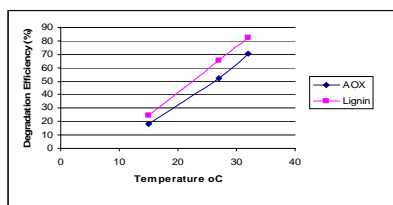


Fig. 6 Temperature effect on Degradation of Lignin and AOX

D. Degradation of Lignin and AOX

Lignin biodegradation by white-rot fungi is an oxidative process probably involving enzymes such as lignin peroxidases (LiP), manganese peroxidases (MnP) and laccases [28]. After treating the effluent of paper industry with *Aspergillus flavus*, the lignin was reduced up to 94% and AOX up to 62% from 0 to 8 days of incubation as shown in Fig. 7. After 10 days of incubation the decreasing trend in absorbance was reversed which could be related to secondary metabolic compounds produced by these species [29]. This observation suggested that greater time of incubation was not a positive factor for higher degradation rates of organic compounds present in the final effluent.

The pH of the effluent was reduced after treating it with *Aspergillus flavus*. The decrease in pH (acidic) may be due to conversion of complex organic compounds in simple inorganic acids [30], [31]. The COD of the effluent also decreased due to removal of lignin. The reduction in COD was also supported by [31]. The COD of the sample was reduced by 45%. The AOX study in the treatment process can be considered as the result of mineralization of chlorinated compounds in the effluent and also due to the activity to aromatic ring oxidation enzymes [30]. Available data of earlier studies indicated that chlorinated phenols are mineralized to chlorine free end products [32]

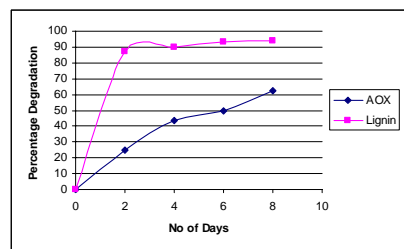


Fig. 7 Degradation of Lignin and AOX by *Aspergillus flavus*

IV. CONCLUSION

The samples were collected from Paper mills and were subjected to isolated fungus for delignification and AOX reduction. The single fungus used was *Aspergillus flavus* and it was isolated from the same samples. The optimum temperature and pH for the biodegradation of lignin and AOX were found to be 32°C and 4. On treating the waste water samples with this fungus at the optimum conditions, we were able to notice degradation of lignin upto 94% and AOX reduction upto 62%. The study concluded that the isolated fungus from Pulp effluent was efficient in degradation of lignin (color causing compound), AOX and reduction in level of COD. There was also decrease in the pH value of treated samples which was due to the metabolism of fungus and metabolic production of acid by *Aspergillus flavus*. The decrease in suspended solids in the sample is due to the presence of fibers.

ACKNOWLEDGMENT

Paper was supported by research grants of TEQIP, World Bank fund. We also like to thank Management and Department of Chemical and Civil Engineering, SDMCET, Dharwad, Department of Chemical Engineering, NITK-Surathkal, Karnataka, India and Department of Biochemistry, KUD, Dharwad, Karnataka, India for supporting the paper with the facilities.

REFERENCES

- [1] L. Sunito, W. Y. Shiu, D. A. Mackay, (1988), Review of nature and properties of chemicals present in pulp mill effluents, *Chemosphere* 17, 1249
- [2] M. Ali, T.R. Sreerishnan, (2001), Aquatic toxicity from pulp and paper mill effluents: A review, *Adv. Environ. Res.*, 5, 175-196.
- [3] A.M. Pedroza, M. Rodolfo, N. Alonso-Vante, R. Rodriguez-Vasquez, (2007), Sequential treatment via *Trametes versicolor* and UV/TiO₂/RuxSey to reduce contaminants in waste water resulting from the bleaching process during paper production, *Chemosphere*, 67, 793 – 801.
- [4] E. Esposito, V.P. Canhos, N. Duran, (1991), Screening of lignin degrading fungi for removal of colour from kraft mill wastewater with no additional extra carbon source, *Biotechnol Letters*, 13, 571– 6.
- [5] M. C. Yeber, J. Rodriguez, J. Freer, J. Baeza, N. Duran, H.D. Mansilla, (1999), Advanced oxidation of a pulp mill bleaching wastewater, *Chemosphere*, 39, 1679- 1688.
- [6] I. M. Banat, P. Nigam, D. Singh, R. Marchant, (1996) Microbial decolorization of textile-dye containing effluents: a review, *Bioresour. Technology*, 58, 217–227.
- [7] H. Kariminiaae-Hamedani, A. Sakurai, M. Sakakibara, (2007), Decolorization of synthetic dyes by a new manganese peroxidase-producing white rot fungus, *Dyes. Pigments*, 72, 157–162.

- [8] R.M. Atlas, R. Bartha, (1998). In *Microbial Ecology: Fundamentals and applications*. 4th Edition. Benjamin and Cummings Science publishing, California.
- [9] R. Nagarathnamma, P. Bajpai, (1999), Decolourization and detoxification of extraction-stage effluent from chlorine bleaching of kraft pulp by *Rhizopus oryzae*, *Applied Env Microbiol*, 65, 1078–1082.
- [10] S. Pallerla, P. Robert, Chambers, 1997. Characterisation of a Ca-Alginate-Immobilized *Trametes versicolor* bioreactor for decolourisation and AOX reduction of paper mill effluents. *Bioresour Technol.*, 60: 1-8.
- [11] M. Tuomela, M. Vikman, A. Hatakka, M. vaara, 2000. Biodegradation of lignin in a compost environment: a review. *Bioresour Technol.*, 72: 169-183.
- [12] P. Bajpai, P.K. Bajpai, (1994), Biological colour removal of pulp and paper mill wastewaters. *J Biotechnol*, 33, 211–220.
- [13] A. Hatakka, (1994), Lignin modifying enzymes from selected white rot fungi- production and role in lignin degradation, *FEMS Microbiol Rev*, 13, 125-135.
- [14] K. E. Hammel, A.N. Kapich, K.A. Jensen, Z.C. Ryan, (2002), Reactive oxygen species as agents of wood decay by fungi, *Enzyme Microb Technol.*, 30, 445–453.
- [15] A. Breen, F.L. Singleton, (1999) Fungi in lignocellulose breakdown and biopulping. *Curr Opin Biotechnol* 10: 252–258.
- [16] D. Eaton, H.M. Chang, T.K. Kirk, (1980), Decolourization of kraft bleach effluent, *TAPPI*, 63, 103.
- [17] T. Fukuzumi, (1980), Microbial decolourization and defoaming of pulping waste liquors In: Kirk TK, Higuchi T, Chang HM (eds) *Lignin Biodegradation Microbiology, Chemistry and Potential Applications CRC Press Boca Raton Florida*, 1, 215-230.
- [18] S.A. Dutta, N.M. Parhad, S.R. Joshi, (1985), Decolourization of lignin bearing waste by *Aspergillus* sp. IAWPC, *Technology Annual*, 12, 32-37.
- [19] A. Mehna, P. Bajpai, P.K. Bajpai, (1995), Studies on decolorization of effluent from a small pulp mill utilizing agriresidues with *Trametes versicolor*. *Enzyme and Microbial Technology*, 17, 18.
- [20] S. Davis, R.G. Burns, (1990), Decolorization of phenolic effluents by soluble and immobilized phenol oxidases. *Appl, Microbiol. Biotechnol.*, 32, 721-726.
- [21] APHA. Standard methods for the examination of water and wastewater. 14th ed. Washington, DC: American Public Health Association; 1989.
- [22] M.A. Tirola, Mannisto, M.K., Puhakka, J.A. and Kulomaa, M.S. (2002). Isolation and characterization of *Novosphingobium* sp. strain MT1, a dominant polychlorophenol-degrading strain in a groundwater bioremediation system. *Appl. Environ. Microbiol.*, 68, 173-180
- [23] M.A. Lara, A.J. Rodriguez, O.J. Rojas, O. Holmquist, A.M. Gonzalez, J. Bullona, N. Penaloza, E. Araujo, (2003), Blackliquor lignin biodegradation by *Trametes elegans*, *International Biodeterioration & Biodegradation*, 52, 167 – 173
- [24] B.K. Belsare, D.Y. Prasad, (1988), Degradation of chlorinated lignin compounds in a bleach plant effluents by white rot fungi *Trametes versicolor*. *Appl Microbiol Biotechnol*, 35, 105–109.
- [25] D.K. Sahoo, R. Gupta, (2005), Evaluation of ligninolytic microorganisms for efficient decolourization of a small pulp and paper mill effluent, *Proces Biochem.*, 40, 1573-1578.
- [26] V.B. Damiano, D.A. Bocchini, E. Gomes, R. Da Silva, (2003). Application of crude xylanase from *Bacillus licheniformis* 77-2 to the bleaching of eucalyptus Kraft pulp, *World J. Microbiol. Biotechnology*, 19, 139-144.
- [27] C. Palma, M.T. Moreira, I. Mielgo, G. Feijoo, J.M. Lema, (1999), Use of fungal bioreactor as a pretreatment or post-treatment step for continuous decolourisation of dyes. *Wat Sci Technol.*, 40, 131–6.
- [28] T.K. Kirk, R.L. Farrell, (1987), Enzymatic Combustion: Microbial degradation of lignin, *Annual Review Microbiology*, 41, 465.
- [29] A.C. Freitas, F. Ferreira, A.M. Costa, R. Pereira, S.C. Antunes, F. Gonçalves, T.A.P. Rocha-Santos, M.S. Diniz, L. Castro, I. Peres, A.C. Duarte, (2009), Biological treatment of the effluent from a bleached kraft pulp mill using basidiomycete and zygomycete fungi, *Science of the Total Environment* 407, 3282–3289.
- [30] Singh Pratibha, (2009), Removal of color and detoxification of pulp and paper mill effluent by microorganisms in two step bioreactor. *Journal of Scientific and Industrial Research*, 63, 944-998.
- [31] P. Sehanat, Pongtharin T, Hunsu P (2009), Decolourization of pulp mill wastewater using thermo tolerant white rot fungi. *Science Asia* 35: 37–41.
- [32] M.F. Homada, A.I.Haddad, M.F. Abd-El-Bary, (1987), Treatment of phenolic wastes in an aerated submerged fixed-film (ASFF) bioreactor. *Journal of Biotechnology*, 5: 279–292.